


Trough Collector™

Model S419

HOW IT WORKS

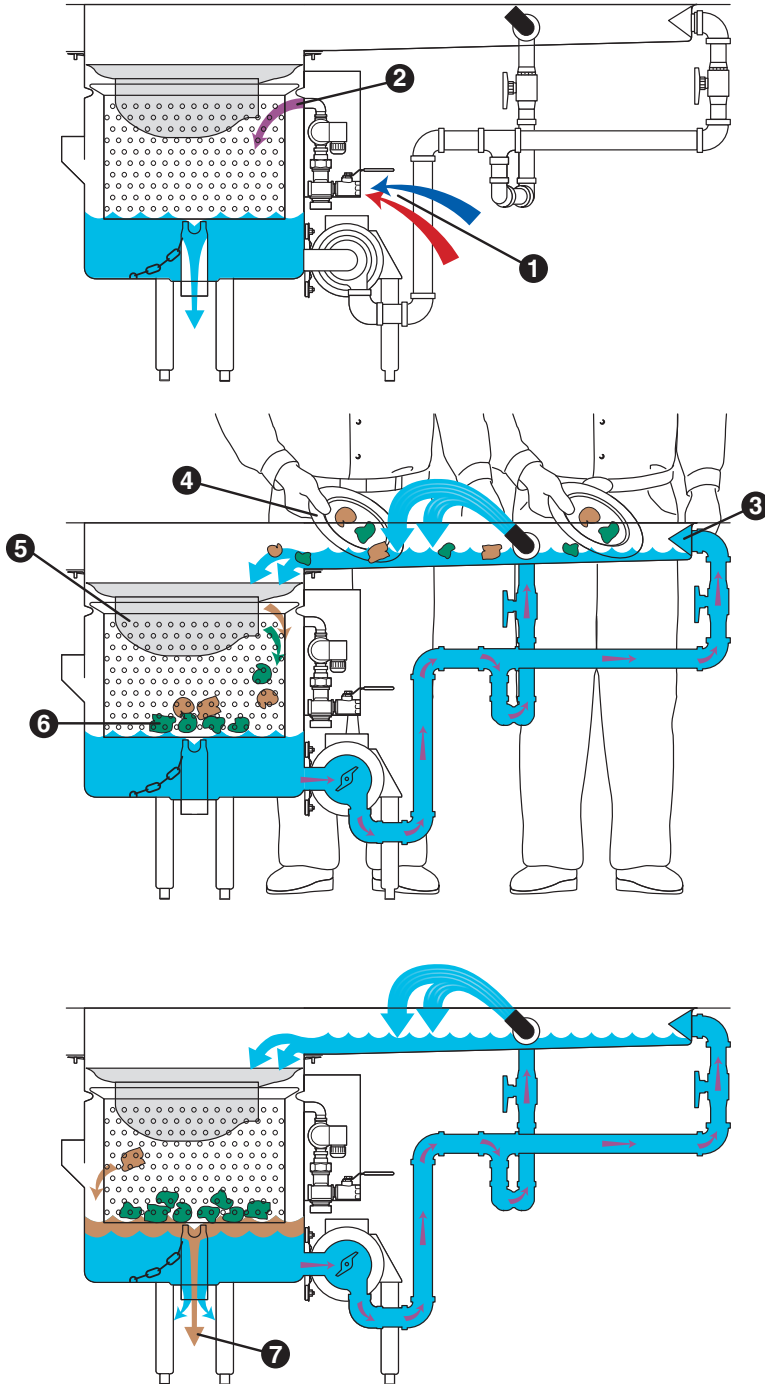

- 1 Hot and cold water pass through a water blender set at 107° F.
- 2 The blended water enters the tank reservoir at the rate of 2 gallons per minute.
- 3 The Collector pump recirculates water down the trough.
- 4 Dishes are scrapped into the trough by hand or passed through the water plume coming from the rubber gusher heads (optional).
- 5 Food waste is carried through the basin and into the scrap basket.
- 6 Soluble food waste washes through the holes in the scrap basket into the tank reservoir. Insoluble and fibrous waste is retained in the scrap basket.
- 7 Excess waste water flows into the drain.

The Salvajor Company 4530 East 75th Terrace Kansas City, Missouri 64132-2081, USA
 1-800-821-3136 (816) 363-1030 FAX: 1-800-832-9373
 www.salvajor.com Email: sales@salvajor.com service@salvajor.com
 Manufacturers of Commercial Food Waste Disposing Systems since 1944